



Set Up Instructions

WLM-2000A


Step 1: Assemble straight poles by pressing and pushing together.

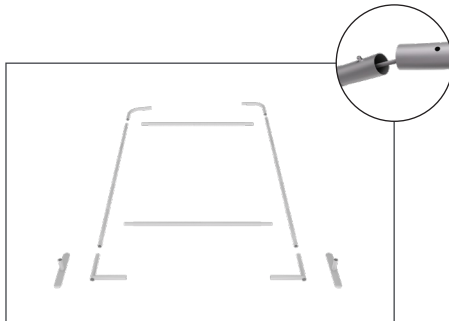


Step 2: Connect all corner sections to curved and straight sections of the frame by matching shape symbols on pipes.

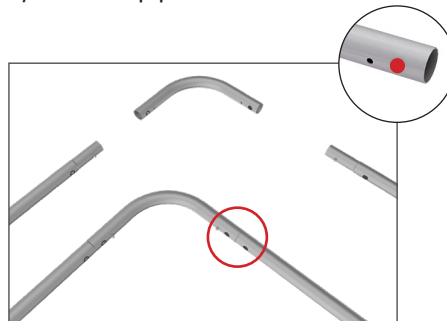



Step 3: Insert feet into base to complete assembled frame shown.

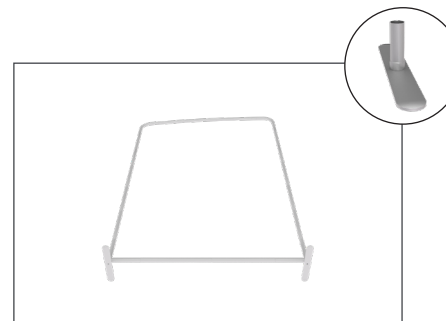

Step 4: Unzip print and lay image face up. Slide print onto frame like a pillow case.

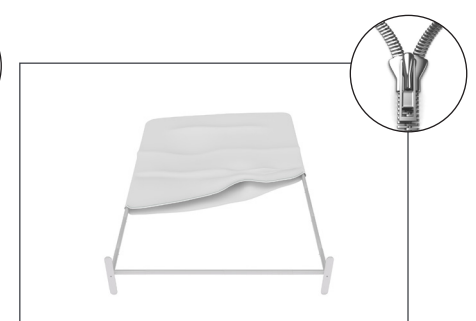

Step 5: Zip the edge of graphic beyond the center point as shown to hold the center pole in place. Zip the remaining side and bottom to meet at the corner.

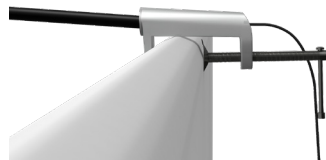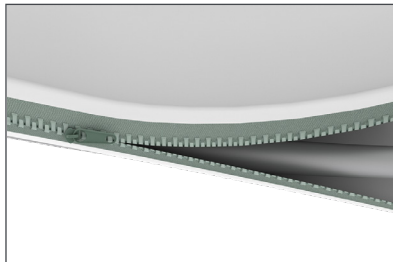

Step 6: Complete.


LIGHTS:
(OPTIONAL) Position as desired and tighten knob to hold in place.
WARNING! Over tightening may cause damage to fabric image.



Set Up Instructions

WLT-43R

Step 1: Connect poles by pressing and pushing together, then connect corner sections to straight sections with matching shape symbols.

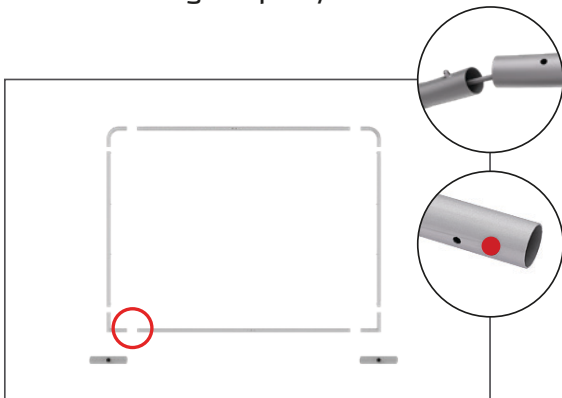


Pull extra cable leash at bottom to secure each LED Light Array into place.

(lights face down)




Step 2: Take out the LED Lights and **gently** unroll on the ground with lights face down. **WARNING!** Do not drag lights across ground or it could break the LED lights.

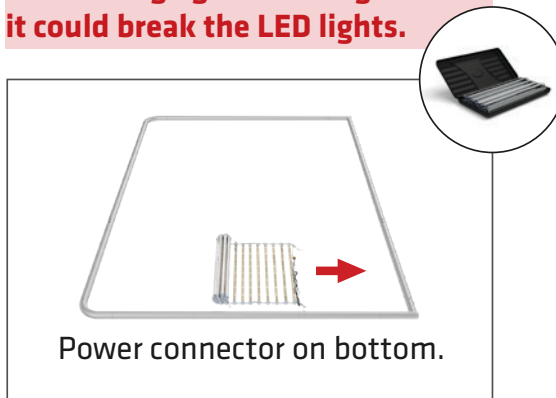


Power connector on bottom.

Step 4: Unzip print and lay image face down. Slide print onto the frame like a pillow case.


(lights face down)

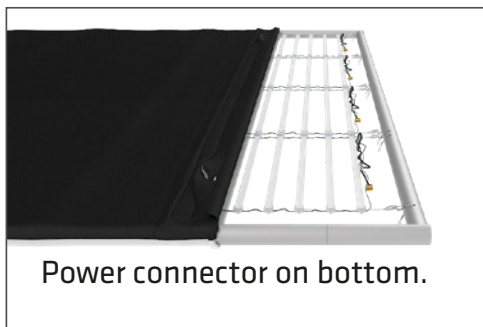

Step 3: Attach each LED Light Array to top and bottom of frame.

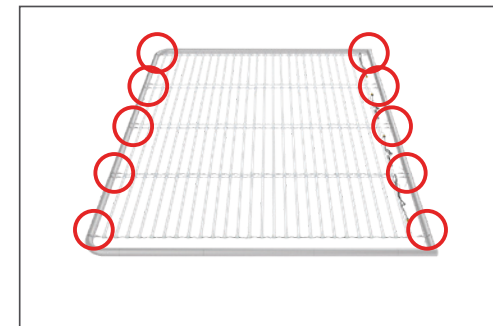


Step 5: Unzip pocket on black fabric for more stretch. Pull graphic over bottom edge and pinch zipper to together to zip closed.

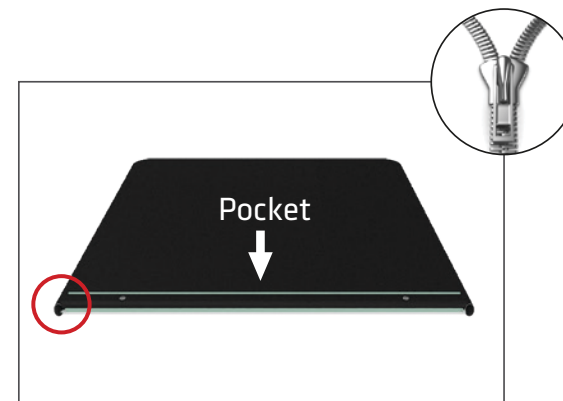

Set Up Instructions


WLT-43R

Step 6: Connect the feet by inserting into the bottom holes of frame and pressing firmly. Lift frame into upright position.

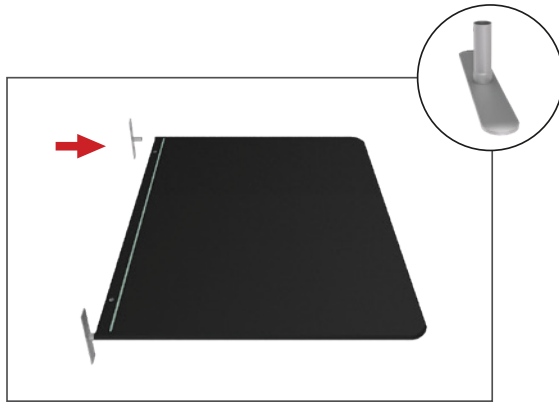

Step 7: Find cable ends and pull through grommet holes. Connect each power cable to a power supply.

WARNING! Only connect one light array to each power supply.

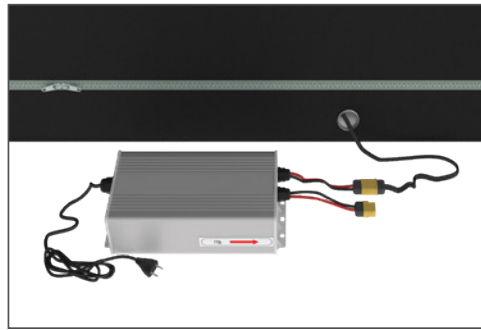

Step 8: Collect cables together and close zipper. Plug power supply into electrical unit and turn on to complete.

NOTE: If you can see the lights and the print is not evenly diffused:

1. Check that the display is level and not leaning forward.
2. The graphic is fully zipped on bottom and under tension.
3. The lights are hooked to the back of frame and the printing is on the opposite front side of frame.
4. Make sure light array has been fully tensioned with the extra cable leash (Step 3) and not loose.



CAUTION!


Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.




Set Up Instructions

CSNRC-100M


Step 1: Assemble all straight pipes with bungee cords by pushing and pulling together.

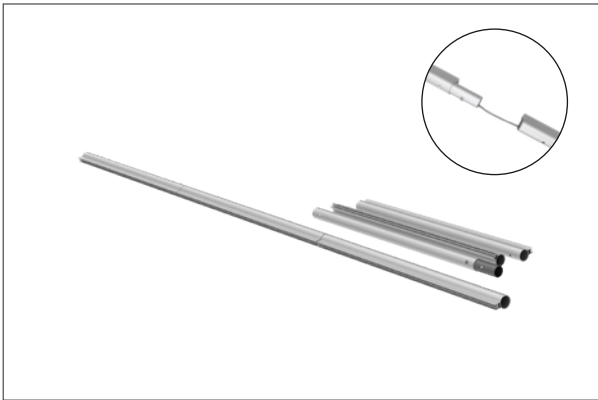


Step 2: Connect all corner sections to straight sections of the frame by matching color on pipes.

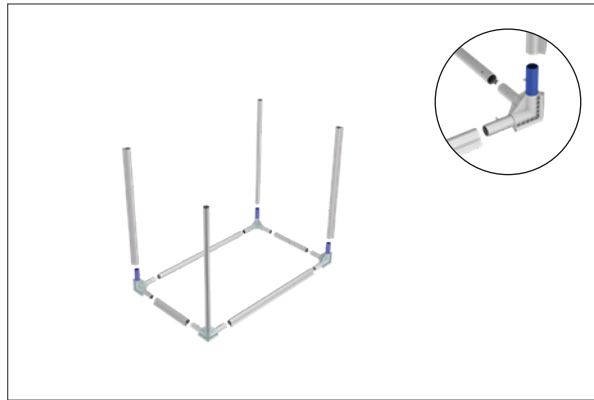



Step 3: Build two outer frames and connect top and bottom frames together in the corners with small connecting pipes.

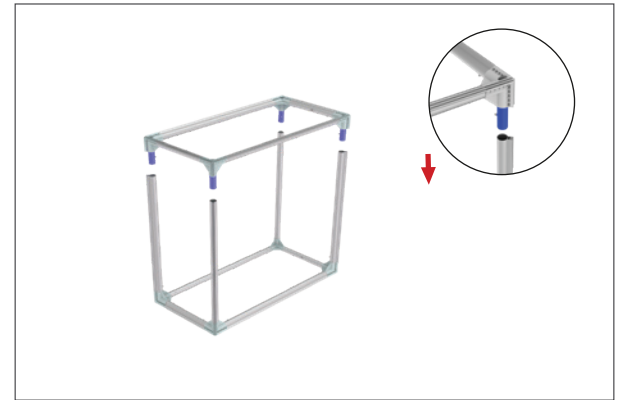

Step 4: At the top of the frame attach cable to left and right side. Tighten or loosen with hand pull.

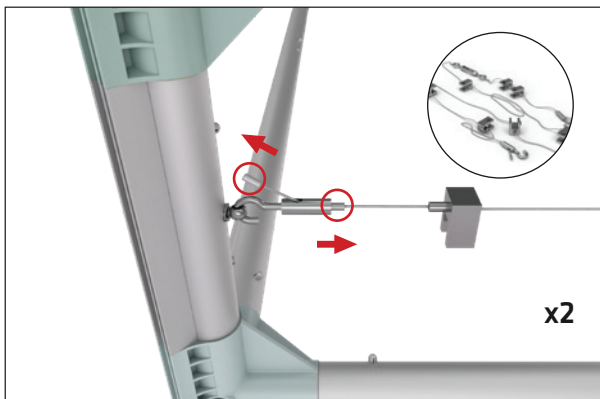


Step 5: Move to the center of cable and hand tighten remaining turn buckle to remove any remaining slack. Do not over tighten.

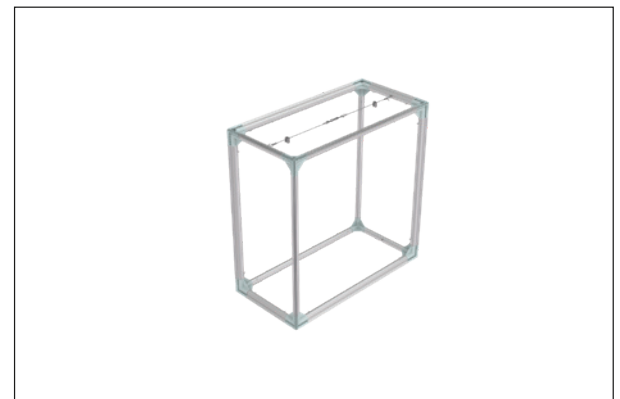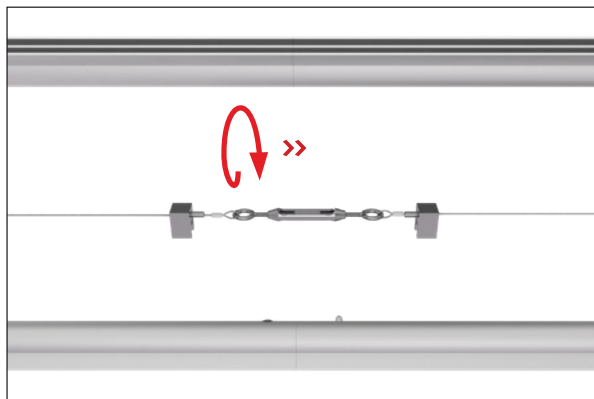

Set Up Instructions

CSNRC-100M


Step 6: Take out the LED Lights and hook the Light Array onto the wire harness clips at the top of frame

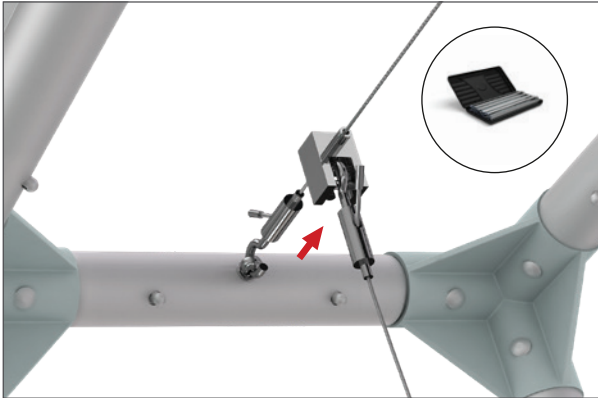

Repeat until all Light Arrays are attached. Lights Arrays do not attach to bottom of frame, but hang under their own weight in final upright position.



Step 7: Completed frame with Light Arrays attached.

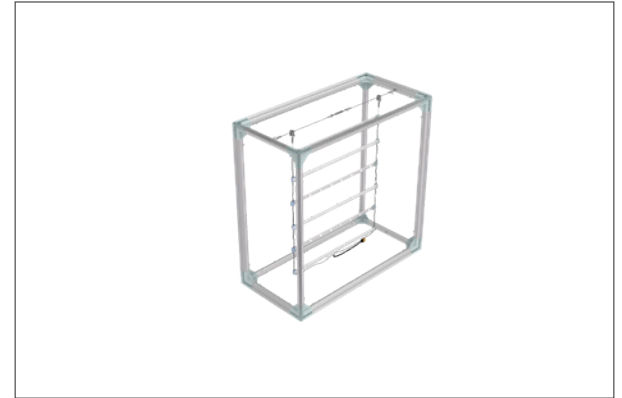

Step 8: Fit PVC inner boards onto the top of frame with wedge side face down. Position and align board until it fits down into the frame.



Step 9: Drape the graphic over frame and gently pull down to bottom of counter on all sides.



Step 10: To complete installation of graphic, gently place counter on its side.




Set Up Instructions

CSNRC-100M


Step 11: Start in one corner of the frame and push the silicone edge of graphic into the outside bottom groove. Insert for 4-6 inches in both directions. Repeat on all corners.




Step 12: Continue inserting silicone edge of graphic into the frame working towards the center of frame on each side. Do not over pull or stretch.

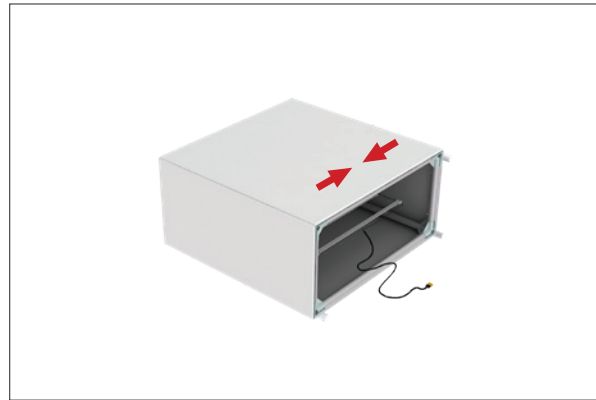

Step 13: Insert feet into 4 corners of the frame base.

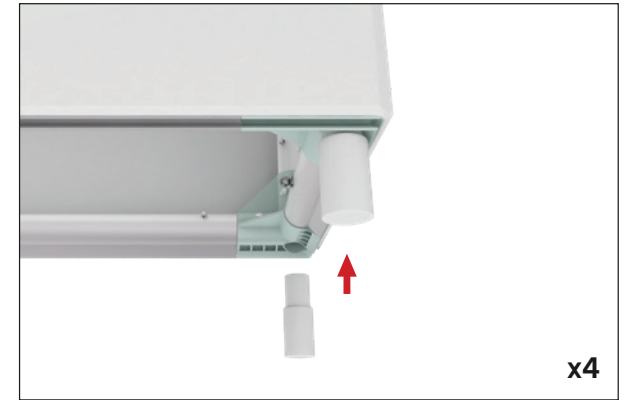

Step 14: Attach LED Light Array to power supply. Stand counter into upright position over top of power supply with power cord showing.

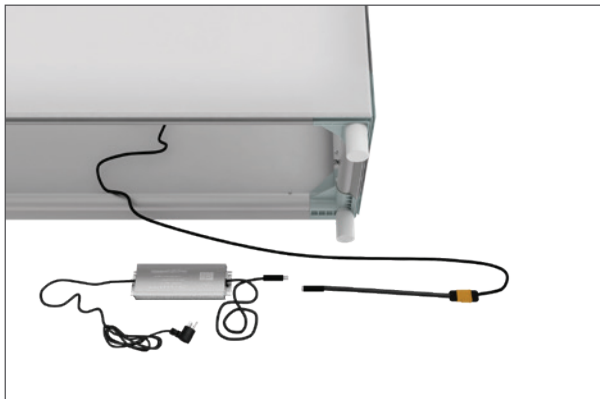

Step 15: Move counter into position and plug power cords into outlet to illuminate display.



CAUTION!

Do not connect lights to power when lights are rolled up. Hang lights on frame before connecting to power for testing.




Set Up Instructions

WLBS-36089FS


Step 1: Assemble straight poles by pressing and pushing together.




Step 2: Connect all corner sections to curved and straight sections of the frame by matching shape symbols on pipes.

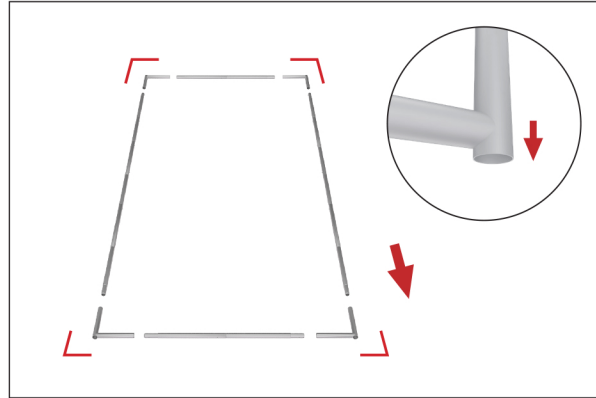


Step 3: Assemble post (75) into base plate or optional feet with screw by hand turning post and tightening into place.

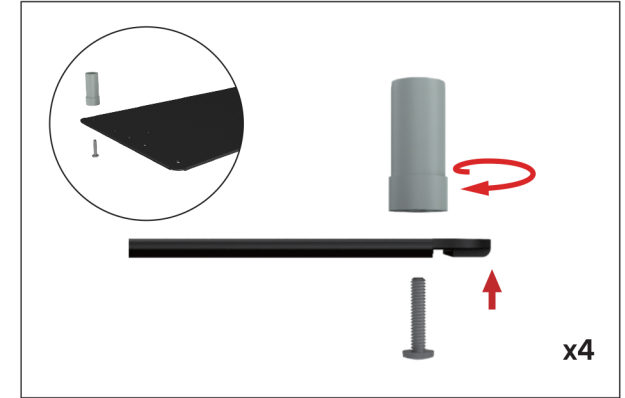


Step 4: Push banner stand frame onto posts of flat base or optional feet. Press evenly on both sides to make easier for the frame to go on.

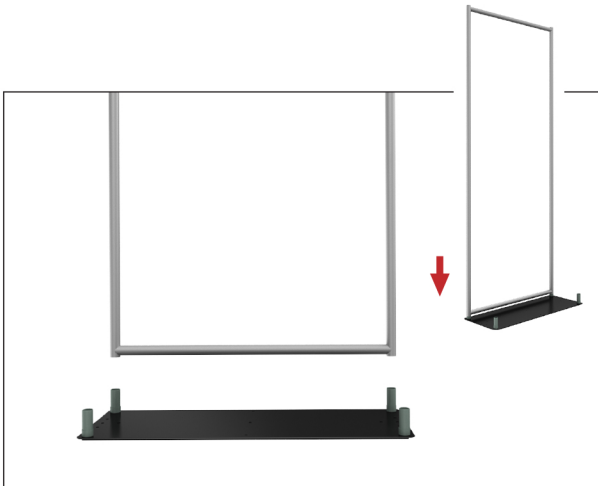

Step 5: Assemble front support poles with J-hook top corners.

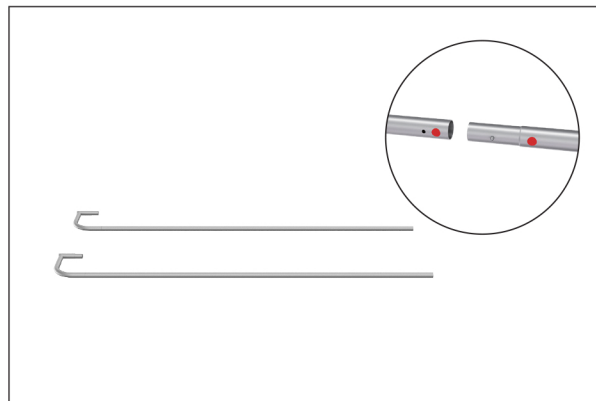

Step 6: Insert front support poles into the top of the frame and front posts.


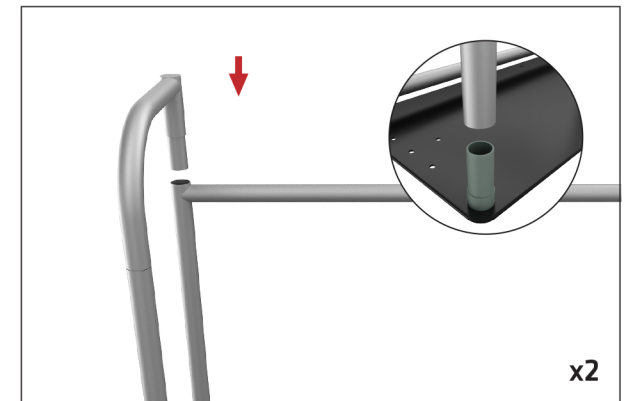


Set Up Instructions

WLBS-36089FS

Step 7: Unpack shelves and begin installation of the shelves on the frame.

SHELVING: Add shelves to frame. Position and level shelves on frame before tightening clamps down with hex tool.

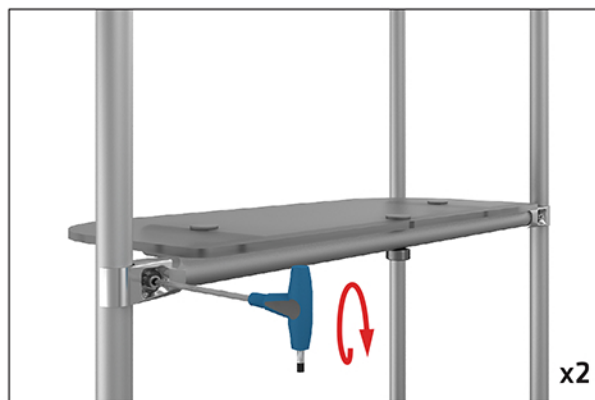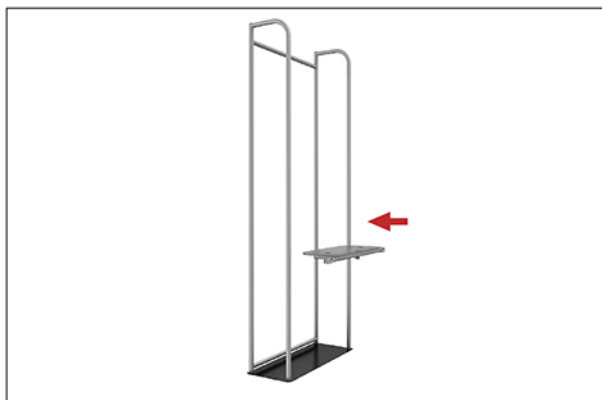


Set Up Instructions


WLMST-H-L

Step 1: Assemble the 3-piece support pole using x4 connecting bars with x8 screws by inserting the bars into the grooves and pushing the poles together.


Note: Placement of the flat bars below.

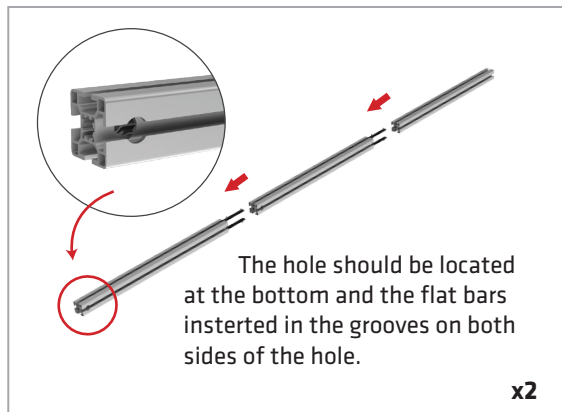


Step 2: Tighten the screws on the connector bars to secure the 3-piece support pole together.

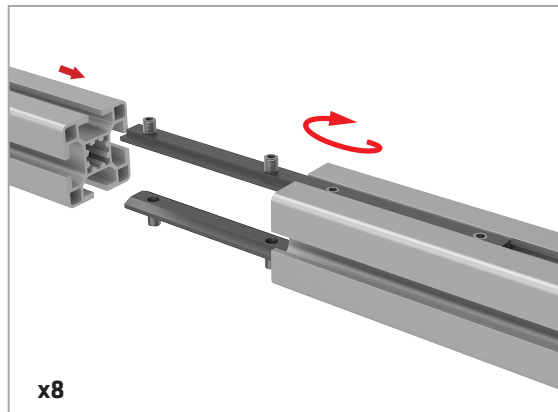

Step 3: Insert the round column nut into the hole at the bottom of the pole. Position the holes in the column nut to face up and down.

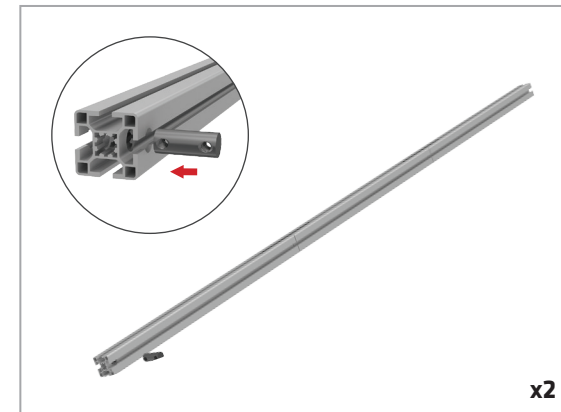


Step 4: Align the support poles with the holes in the base and insert screws through the bottom of the base. Tighten screws to secure.

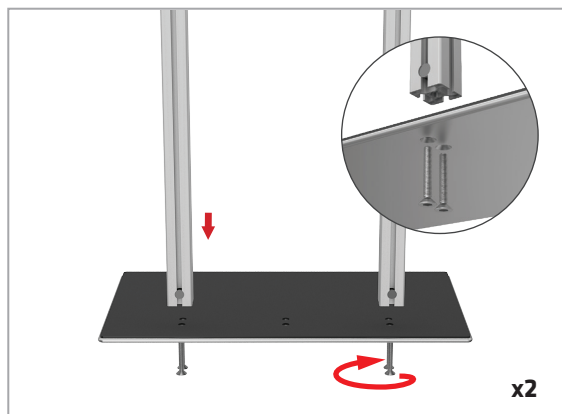

If you are installing the TV Stand behind a WaveLine Display with pass through holes already cut into the graphic, then skip to **Step 9**.



Step 5: To install the VESA Mount insert the screw through the hole and into the wedge. Place the wedge into the groove of the pole and rotate. Tighten screw.

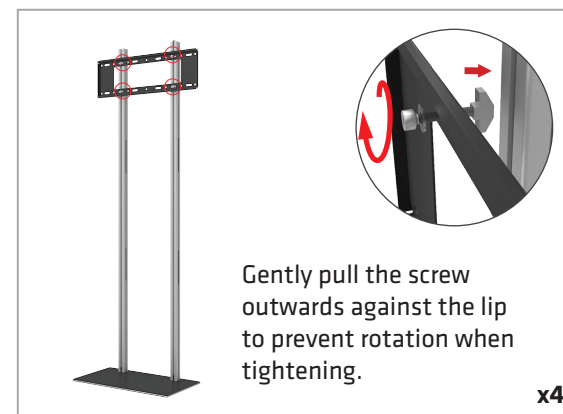

Set Up Instructions

WLMST-H-L


Step 6: Attach x2 - VESA Mounting Bars to the desired position on the back of the TV with x4 screws. Use the same position on each side of the TV for both mounting bars.



Step 7: Hinge TV with VESA Bars onto the VESA Mounting Plate until the TV hangs freely on its own.






Step 8: Secure the bars onto the mounting plate with x2 locking screws to keep TV from moving.

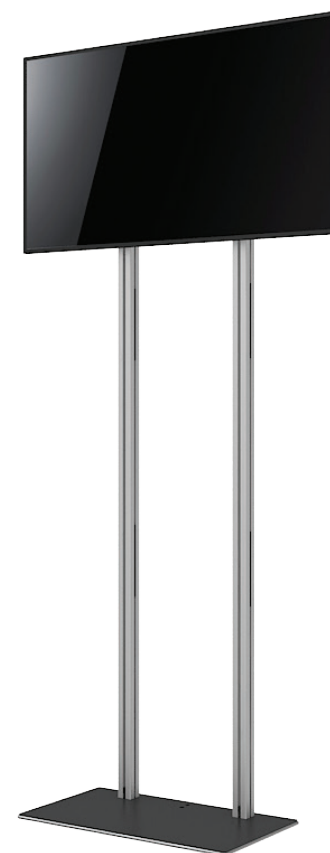

Set Up Instructions

FLAMINGO

Final Assembly: Remove the single-post feet from the center WaveLight Display panel and replace with double-post feet. Remove the inside single-post foot from the inside of each WaveLine 2000A panel and attach to the back of the WaveLight Display panel double-post feet.

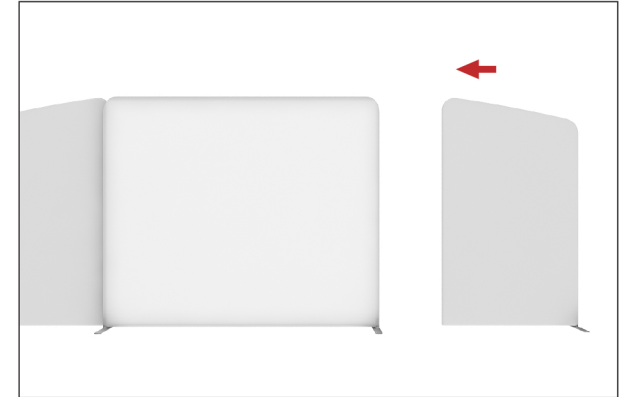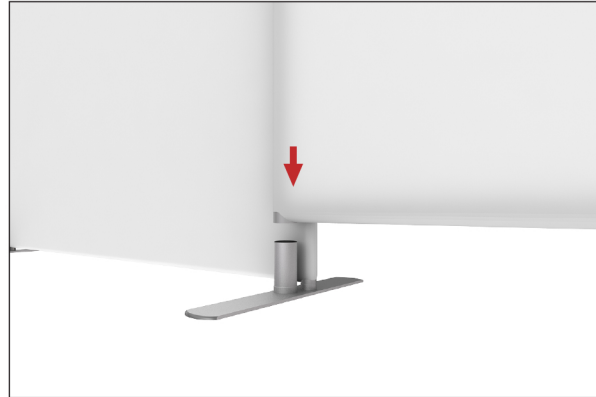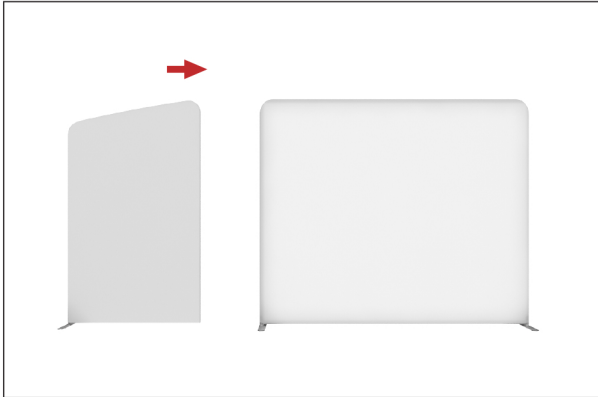

Move accessories into position to complete setup.

